

## SAWS/R Series

Capacity:  
**10-23 ton**

Align Size:  
**32-50 mm**


Maximum Operating Pressure:  
**700 bar**

## SAWS/R 鋼筋校正器

- 油缸硬鉻處理強化線性力
- 高度機動性
- 握把設計符合人體力學

### Steel bar alignment tool

- ※Chrome plate cylinder provides linear force.
- ※High maneuverability.
- ※Ergonomics handle.

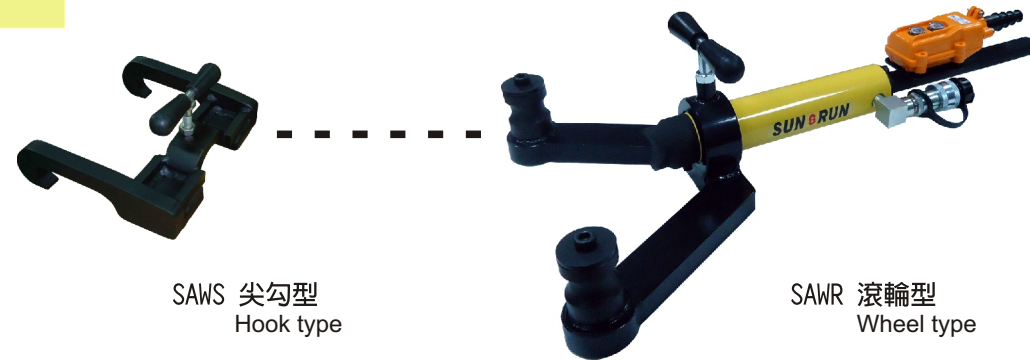

適用泵浦類型  
Apply hydraulic pump




Hydraulic Electric Pump  
SPE-3000 series



Hydraulic Manual Pump  
SPH series

型號 Model	出力 Capacity (kN)	油缸型號 Cyl. Model	校直徑 Align Size (mm)	重量 Weight (kg)
SAWS-10	101	RSC-104	Φ34	10.5
SAWR-10		RSC-106		11.9
SAWR-15	142	RSC-154	Φ40	12.5
SAWR-25	232	RSC-254	Φ50	20.3

## SLS Series



Capacity:  
**12-30 ton**

Clamp Size:  
**10-32 mm**

Maximum Operating Pressure:  
**700 bar**

## SLS 鋼筋拉拔器


- 中空柱塞設計, 適合性廣泛
- 主軸及缸內硬鉻處理, 耐磨抗腐蝕
- 缸體表面粉體塗裝防銹抗腐蝕

### Steel bar tensional tool

- ※Hollow plunger design allows for most application.
- ※Hard chrome plated plunger and inner of barrel resists wear and corrosion.
- ※Powder coat finish for increased corrosion resistance and antirust.



適用於錨定試驗用  
Apply to anchoring bolt

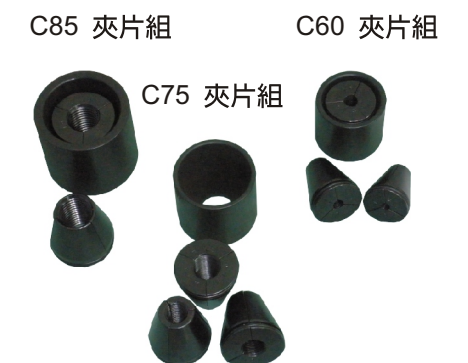

### 選配

液壓手動泵浦 (詳見型錄SPH系列)  
Equipped with Hydraulic Manual Pump (reference SPH series)

充油防震壓力/荷重表 (詳見型錄XH系列)  
Hydraulic Force & Pressure Gauges(reference XH series)

電子式防震壓力/荷重表 (詳見型錄XHD系列)  
Digital, Hydraulic Force & Pressure Gauges(reference XHD series)

適用噸數 Tons (kN)	適用油缸 Cyl. model	夾座型號 Cup model	適用夾片型號 Clamp model 尺寸 Size			選配手泵浦 Opt. Hand Pump
12 (125kN)	RSCH-12 series		適用於錨定試驗用 Apply to anchoring bolt			SPH-900
20 (215kN)	RSCH-20 series	SLS-C60	SLS-L03 3/8" /10mm	SLS-L04 1/2" /12mm	SLS-L05 5/8" /16mm	SPH-1200
30 (326kN)	RSCH-30 series	SLS-C75	SLS-L06 3/4" /20mm	SLS-L07 7/8" /22mm	SLS-L08 1" /25mm	SPH-2000
30 (326kN)	RSCH-30 series	SLS-C85	SLS-L09 1-1/8" /28mm	SLS-L10 1-1/4" /32mm		SPH-2000